

LED FLOOD LIGHT

Flood Light series

LED Lighting System-50,000Hours+ L70

Commercial/Architectural Grade

Technology Information

- Architectural UV resistant powder coat finish
- Voltages:12V AC/DC (Tolerance:12-18V AC, 10-26V DC) or 100-277V
- Lens:Polycarbonate Optical lens
- IP Rating:IP66
- Operating Temp:- 20°C to +40 °C
- Finish: Bronze/Black
- Power Supply Efficiency: > 90%
- Lifetime > 50,000 Hrs (Ta=30°C@L70)
- Mounting Options:1/2`Knuckle Mount



10W/12W/20W/30W/50W 100W/150W/200W


A Type



LM-79LM-80



Dimension:

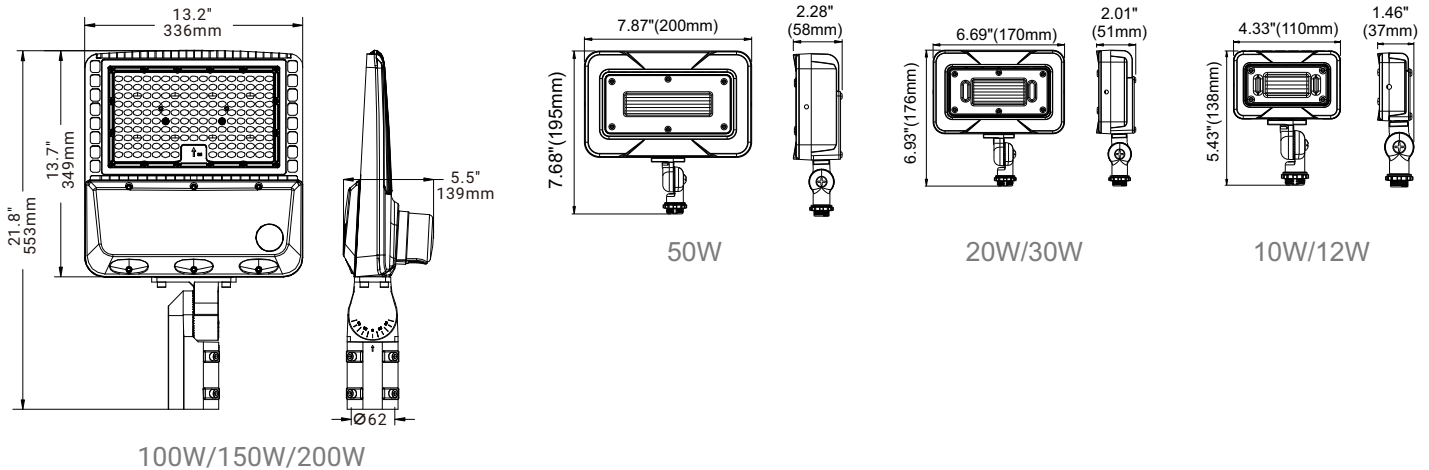

ORDERING INFORMATION

Item code	Watts	Lumens	Operation Vol.	Color Temperature	Starting Temperature	Replace HID
FL01-12W-A	10W	1000 lm	100-277V / 12V AC/DC	3000K/5000K	-20 °C	25-35W
FL01-12W-A	12W	1200 lm	100-277V / 12V AC/DC	3000K/5000K	-20 °C	31-41W
FL01-20W-A	20W	2200 lm	100-277V / 12V AC/DC	3000K/5000K	-20 °C	55-65W
FL01-30W-A	30W	3300 lm	100-277V / 12V AC/DC	3000K/5000K	-20 °C	80-100W
FL01-50W-A	50W	6000 lm	100-277V / 12V AC/DC	3000K/5000K	-20 °C	140-160W
FL01-100W-A	100W	13500 lm	100-277V	3000K/5000K	-20 °C	270-330W
FL01-150W-A	150W	20250 lm	100-277V	3000K/5000K	-20 °C	420-480W
FL01-200W-A	200W	27000 lm	100-277V	3000K/5000K	-20 °C	570-630W



Web: www.litetron.us
Email: pibinc@gmail.com

All right reserved @ LITETRON