

# UFO LED High Bay Light

## High Bay series

LED Lighting System-50,000Hours+ L70

Commercial/Architectural Grade

### Technology Information



PC cover



- System Watts: 100W/150W/200W/240W/255W
- Voltages: 100-277VAC / 200-480VAC
- Beam angle: 120°
- Efficacy: 130lm/w (Frosted Glass Lens)  
150lm/w (Transparent Glass Lens)
- IP Rating: IP66
- Finish: Black / White / Gray
- Operating Temp: -20 °C to +40 °C
- Dimmable: 1-10V Dimmable
- Intelligent Control: Microwave Motion sensor
- Mounting Option: Ceiling with loop/Ceiling with hook  
Wall Mounting/Pendant Mounting
- PC cover model available
- Color Temperature: 4000K/4500K/5000K/5700K




## LM-79 LM-80




### Features:

LED High Bay is designed to replace traditional metal halide lamps. The luminaire housing is made of die-cast aluminum and sealed with a glass lens. LED High Bay luminaires are ideal lighting solutions for commercial applications such as warehouses, stadiums, factories, conference centers and arenas.

### Dimension:



100W / 150W

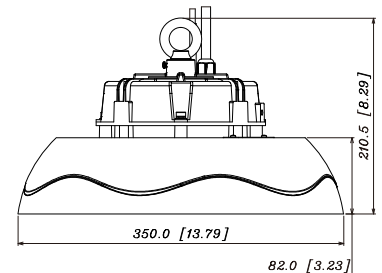

200W / 240W / 255W

### ORDERING INFORMATION

Item code	Watts	Lumens	Operation Vol.	Color Temperature	Starting Temperature	Replace HID
HB01-100W	100W	15000 lm	100-277 Vac	4000K/4500K/5000K/5700K	-20 °C	270-330W
HB01-150W	150W	22500 lm	100-277 Vac	4000K/4500K/5000K/5700K	-20 °C	420-480W
HB01-200W	200W	30000 lm	100-277 Vac	4000K/4500K/5000K/5700K	-20 °C	570-630W
HB01-240W	240W	36000 lm	100-277 Vac	4000K/4500K/5000K/5700K	-20 °C	690-750W



Web: [www.litetron.us](http://www.litetron.us)  
Email: [pibinc@gmail.com](mailto:pibinc@gmail.com)